

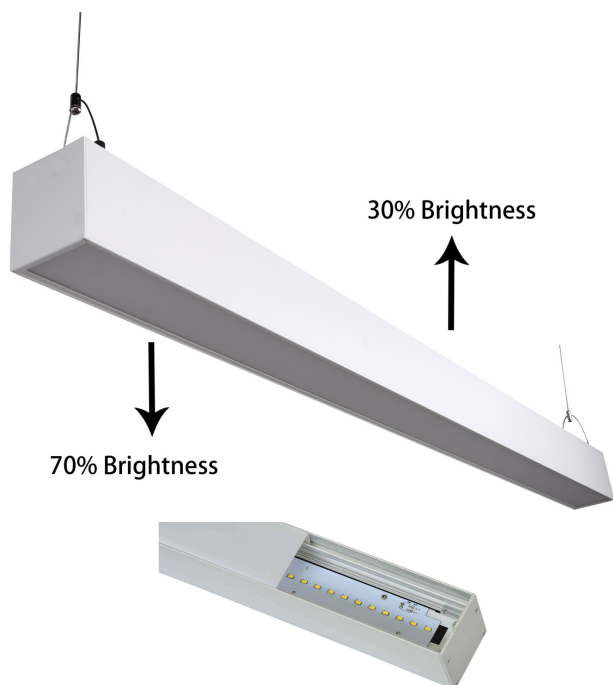


LED UP and DOWN SUSPENDED LINEAR LIGHT



Application: offices, schools, showrooms, airports, retail locations, and healthcare facilities



FEATURES

- Three Way Switch: Option of up-light only, down-light only or up&down light
- Suitable for damp locations: Reliable quality and safe operation.
- Available in silver or white finish
- Aluminum Heat sink for Efficient Heat Dissipation
- Linkable: maximum of 7 pcs can be linked together

SPECIFICATIONS

Volts: 120-277VAC

Power Factor: >0.9

THD: <20%

Average Rated Life: 50,000

Driver Efficiency: >87%

Beam Angel: 100°

CRI: >80

CCT: 4000K/5000K

Color: Silver/White

Ambient temp: -4°F to 104°F

ORDERING GUIDE

Model No: HY-4FT-LUD-(xx)K				
Company Code	Size	LUD	P	C.C.T.
HY	4FT: 4FT	LUD: Linear Up and Down	DLC Premium	40K: 4000K
				50K: 5000K


LED UP and DOWN Linear Light

SPECIFICATIONS


Catalog No.	Power	Lumens	Lumen Efficiency	C.C.T.	Dimmable	ETL Listed	Voltage	Qty per Case
HY-4FT-LUD-40K	50W	5,500	110LM/W	4000K	N/A	YES	AC100-277V	4
HY-4FT-LUD-50K	50w	5,500	110LM/W	5000K	N/A	YES	AC100-277V	4

DIMENSION


Length x Width x Height: 47.2" x 2.75" x 3.15"

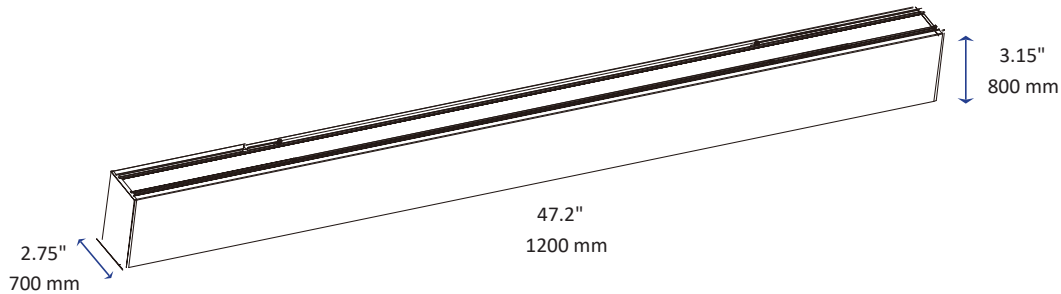


INSTALLATION

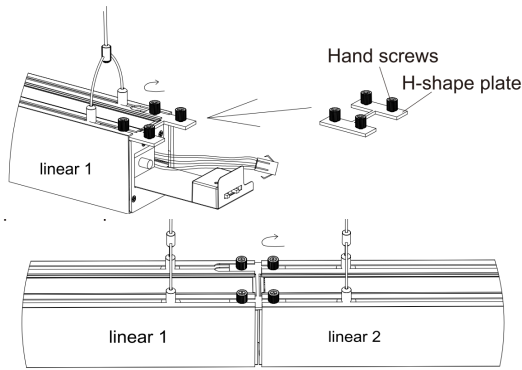

Link instruction

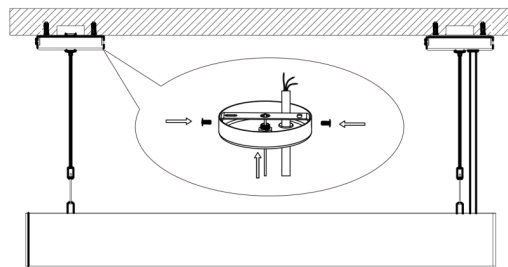

Suspend Mount

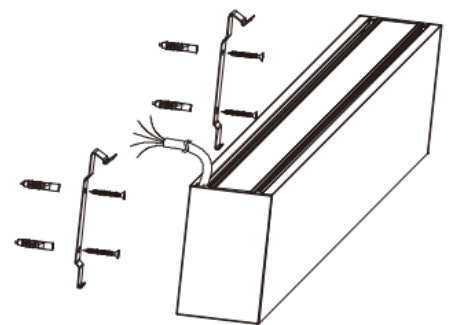

Wall Mount

LIGHT DISTRIBUTION DIAGRAM

