

LED Tri-Proof Linear Luminaire



Application: Parking garages; docks; subway station; canopy; walk-in refrigerators; awning...



Specifications:

Model No.	HY-4FT-LV401-32W-XXK	HY-8FT-LV401-64W-XXK
Power:	32W	64W
Input Voltage:	AC100-277V	
Luminous Flux:	4160	8320
Efficacy:	130 lm/W	
Power Factor:	>0.9	
THD:	<10%	
CCT:	5000K (4000k Option)	
CRI:	>80	
Working Life:	>50,000 hours	
Working Temperature:	-10°F to 105°F	
Protection Level:	Wet Location/IP65	
Product Size:	2.46" x 2.24" x 47.63"	2.46"x2.24"x95.27"
Qty/Pack	10	6
Packing Size:	6.67"x14.96"x52.36"	6.67"x9.45"x99.61"
Net Weight/Pack	30.86 lbs	33.07 lbs

FEATURES

- IP 65, water tight and dust tight
- Suitable for wet location
- Available in 4 foot and 8 foot
- Aluminum housing for thermal management and polycarbonate lens
- 0-10V Dimmable
- Linkable: 4FT (Max 4pc) & 8FT (Max 3PC)


Application

- Parking garages; docks; subway station; canopy; walk-in refrigerators; awning
- Indoor and Outdoor Application

Ordering Guide

Model No: HY-(X)FT-LV401-(XX)W-(XX)K				
Company Code	Length	Product	Watt	C.C.T.
HY	4FT	LV401: Linear Vapor Proof Luminaire	32W	50K: 5000K
	8FT		64W	


DIMENSION

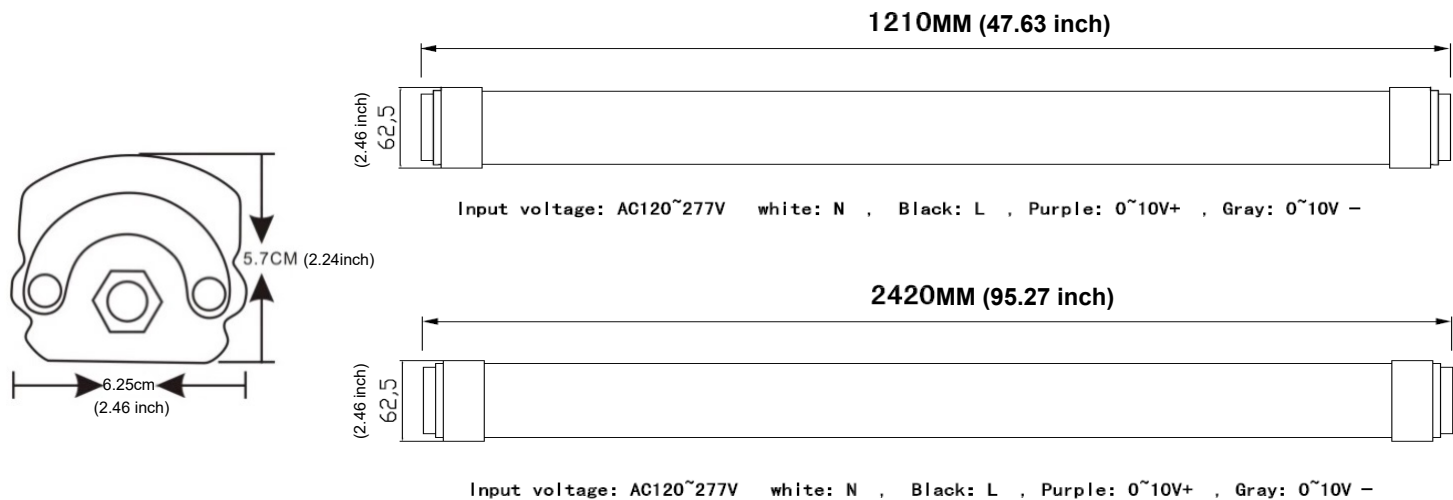


Installation Guide

Suspending

1. Install the suspension rope




2. push the Lamp body into the mounting clips




Surface Mount


- Step 1

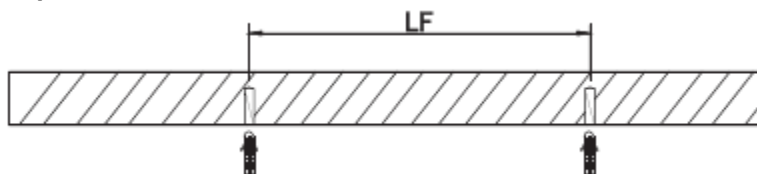


- Step 2

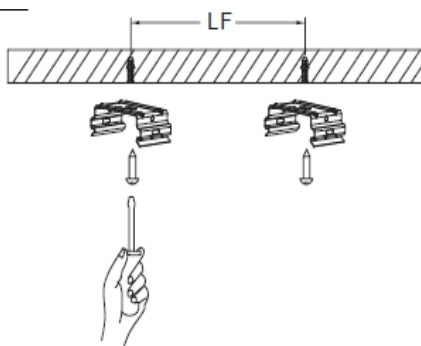

- Step 3

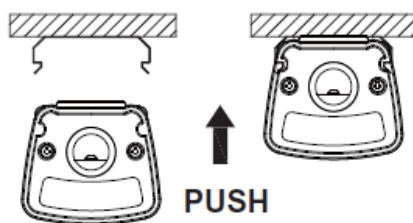

Connection Installation

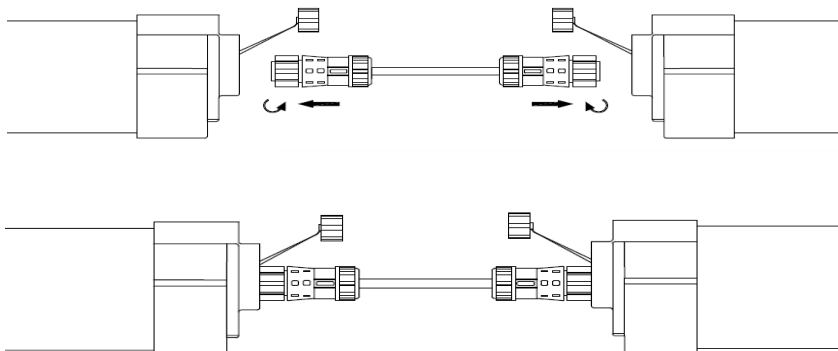

PHOTOMETRIC REPORT

