



LED UFO High Bay Fixture - F1 Series



Industrial application:
Warehouse, Factory etc.

GENERAL DESCRIPTION


The F1 Series UFO High Bay LED luminaires are slim, sleek and lightweight for easy install, and suitable for up to 30 foot mounting heights. The UFO High Bay delivers efficient and uniform light. The luminaire offers a 50K hour life rating and is suitable for elevated ambient temperatures. It is the most cost efficient option for warehouses, gymnasiums, production assembly areas, and any high ceiling applications.

FEATURE

- Twist on Microwave Motion Sensor
- Built-in cooling fins provide maximum heat dissipation for higher ambient temperatures
- Die cast hook mount standard for ease of installation
- 1/2" threaded hub for pendant mount applications
- Impact resistant glass lens: 90% Light Pass Rate
- Includes 6-foot power & dimming cord with leads
- Lightweight and small size: save shipping and installation cost

APPLICATIONS

Suitable for wet location: Warehouse and industrial lighting



SPECIFICATIONS

Volts: 110-277 VAC

Power Factor: >0.9

THD: <20%

Average Rated Life: 50,000

Beam Angle: 110°

CRI: >80

CCT: 5000K

Color: Black

Ambient temp: -40°F to 140°F

ORDERING GUIDE


Model No: HYA-UFO/F1-150W-110-H-50K [Blank;MS]						
Company Code	Product	Watt	Beam Angle	Voltage	C.C.T.	Sensor Option
HYA	UFO/F1: F1 Series UFO High Bay	100W	110: 110 Degree Beam Angle	H: 110-277V	50K: 5000K	Blank: No Sensor MS: Microwave Sensor
		150W				
		200W				

LED F1 Series UFO High Bay Fixture

SPECIFICATIONS

Model No.	Power	Lumens	Lumen Efficiency	CCT	Dimmable	Mounting Height	Voltage	Qty per Case
HYA-UFO/F1-100W-110-H-50K	100w	13377	135LM/W	5000K	0-10v	15' to 20'	AC100-277V	1
HYA-UFO/F1-150W-110-H-50K	150w	20209.5	135LM/W	5000K	0-10v	20' to 25'	AC100-277V	1
HYA-UFO/F1-200W-110-H-50K	200w	27737.3	135LM/W	5000K	0-10v	25' to 30'	AC100-277V	1

DIMENSION

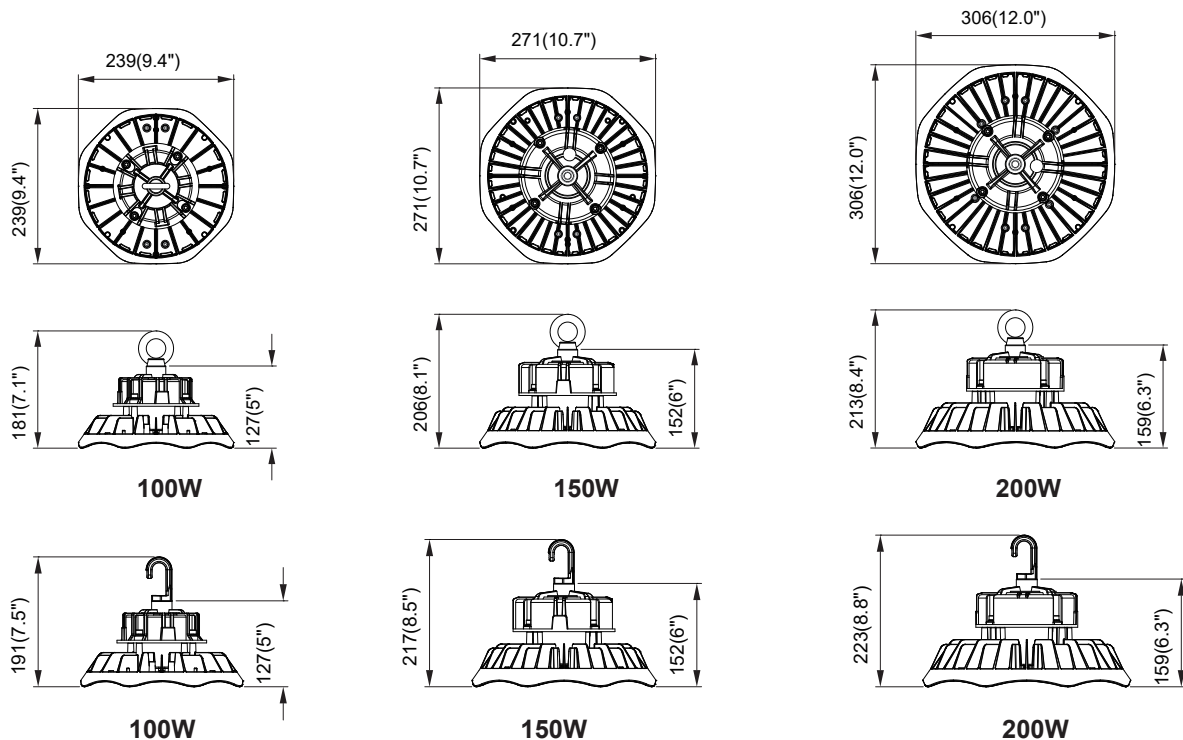

Wiring Connection

Turn off the power before installation

